


## Teknofibra Contact

### INFORMATION FOR THE INSTALLATION

#### Functional graphic scheme

##### Correct installation:

Teknofibra Contact works because the aluminum surface transports the heat of the heat source to cooler areas. The aluminum surface is designed to minimize the thermal exchange and the insulating felt reduces the propagation of heat to the area to protect. The surface to be put in contact with the heat source is that one in rigid aluminum. The contact surface with the hot source has to be much lower than the total Teknofibra Contact area.

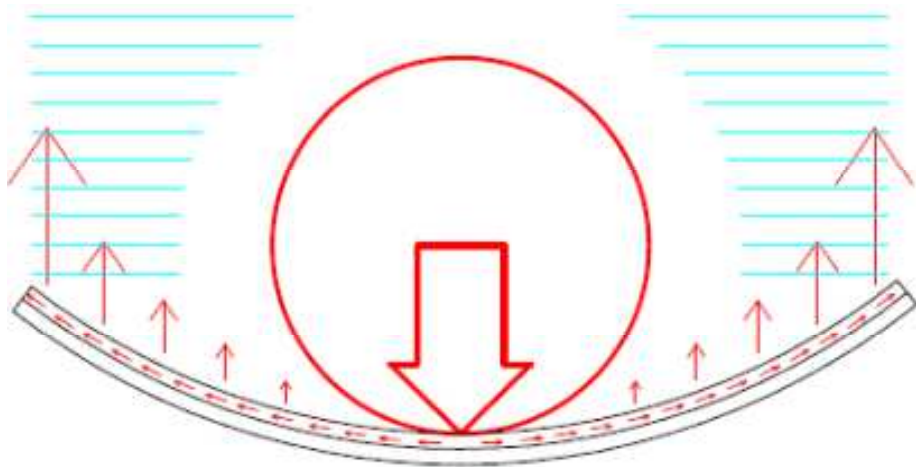

##### Incorrect installation:

Teknofibra Contact is not suitable to wrap parts of the exhaust system. Do not apply in the opposite manner to that described above (aluminum hard outside).

